



**WINTER
CATALOG
2018 /**

20+ YEARS

CONTENTS

03 / AutoWing Plows

05 / QuattroPlow

07 / Snow Plows

09 / NEW ProPlowFX

11 / UltraPlow

13 / AlphaPlow

14 / FastTach

15 / WolfWings

17 / Snow Pushers

19 / UltraPusher

21 / UltraPusherTE

23 / UltraMaxPusher

25 / Snow Tires

27 / WolfPaws

29 / Snow Blower

31 / UltraBlower

32 / Specifications

LEGEND



Tractor



Municipal Tractor



Utility Vehicle



Skid Steer



Compact Wheel Loader



Backhoe



Wheel Loader

OF SHARP SOLUTIONS


Welcome to SnowWolf®'s new look, which comes with a renewed commitment to giving your business a serious competitive edge. For us, this means professional-grade equipment that's intelligently designed to improve the way you work. It also means industry-leading customer care and service.

Having originally started as contractors, we have a deep understanding of the art and science of this business, and how equipment choices relate to productivity and performance. And we're happy to share our know-how with you.

We are family-owned, and a "live company", meaning we personally answer every phone call, so don't hesitate to give us a buzz, or drop us a line if you prefer.

Our goal is to give you equipment solutions that work the way you need them to, and give you an outstanding return on your investment.

Looking forward to working with you,



JERRY HOLMAN
Co-CEO



MARK HOLMAN
Co-CEO

WELDING

The majority of our weld process is now performed robotically, giving excellent weld quality and perfect consistency.

PAINTING

Our conveyorized powder-coat paint system starts with a five stage phosphate cleaning process, has six automatic spray stations and a finishing station with a forced-air drying line to give you the long-lasting finish you should expect.

THE FINISHED PRODUCT

In the end, the products you receive are backed by true professionals with a broad range of backgrounds—manufacturing, marketing, sales and customer service. These blend into a well-rounded, effective team which performs synchronously to deliver the best possible service and products to our clients.



AUTO WING PLOWS



QuattroPaw™

PAGE 5

FOR: 6,000 – 14,000 lb. Machinery



Skid Steer



Compact Wheel Loader



Tractor



"Absolutely amazed. I knocked 3 hours today off the same route I have been doing for 4 years"

Robert T.


Fine Design Landscaping & Masonry
Holbrook, NY



QuattroPLOW™

4X THE PLOW


The QuattroPLOW is a four-in-one plow that combines the best of our UltraPLOW™, FastTach® and WolfWings™. The results are greater flexibility, efficiency and effectiveness in four distinct functions, all without any extra electric harnesses or controllers in your machine. Easily shift from angle plowing to straight plowing to high-capacity pushing to backdragging in just seconds without ever leaving your machine or even pushing a button. A fifth function, wide-angle plowing, extends your plow by 23 inches on each end. All it takes is less than a minute to reposition the wing cylinders on each side of the plow.

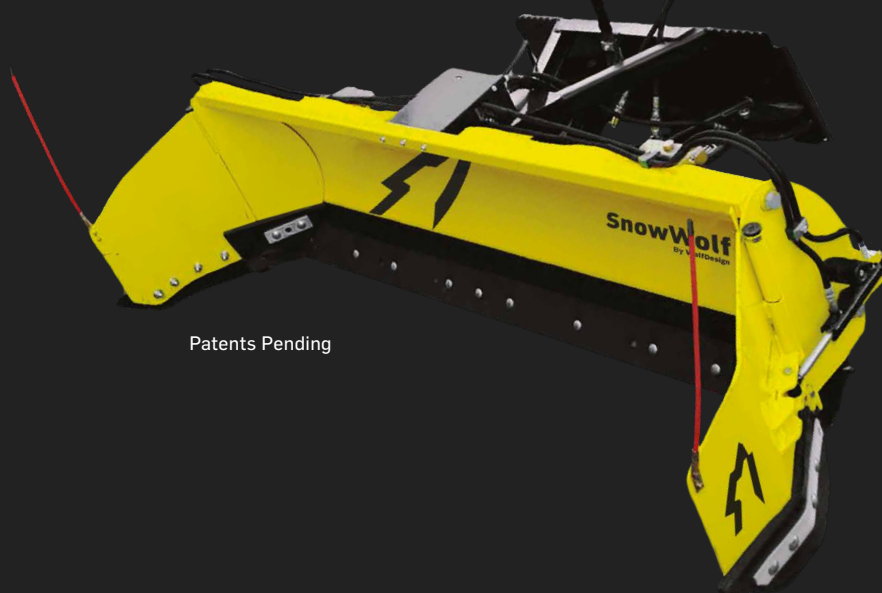

Patents Pending



QuattroPLOW wings operate automatically using only two hoses and couplers, just like an angle plow.



165-DEGREE WING ROTATION Move wings all the way forward for pushing, to the sides for plowing, or all the way back for backdragging. Allows you to carry more snow backward for a greater distance and fewer windrows.



23-INCH EXTENSION ON EACH END IN WIDE-ANGLE POSITION Especially efficient for operators who seldom or never need backdragging containment.



35-DEGREE-ANGLE TIPS ON WINGS Provides greater carrying capacity while minimizing windrows regardless of the direction the machine is moving. Keeps the wings clear of the machine's front tires.



SMART VALVE This SnowWolf exclusive hydraulic valve controls the plow wings without removing your hands from the controls. Angle right and hold for snowpusher position. Angle left and hold for wing plow or backdrag positions.



SNOW PLOWS

HYDRAULIC ANGLE

NEW!



ProPlowFX™

PAGE 09

FOR: 2,000 – 6,000 lb. Machinery



Tractors



Utility Vehicles with Loaders



Small Skid Steers

UPDATED



UltraPlow™

PAGE 11

FOR: 6,000 – 14,000 lb. Machinery



Skid Steers



Compact Wheel Loaders



Tractors with Loaders



AlphaPlow™

PAGE 13

FOR: 14,000 – 40,000 lb. Machinery



Backhoes



Wheel Loaders




Tractors with Loaders



**NEW!**

ProPlowFX™ Patents Pending

Good things sometimes come in small packages. SnowWolf®'s compact ProPlow offers key large-plow features to deliver excellent performance at a very accessible price point.

**FULL TRIP DESIGN**


This feature of the SnowWolf® ProPlow protects the machine and operator if an obstacle is struck. Coil type springs give soft trip action.

**SEMI-FLOATING DESIGN**

This innovative feature, exclusive to the SnowWolf® ProPlow, allows the operator to apply approximately 250 pounds of down pressure without lifting the front wheels of the tractor off the ground.

**35° ANGLE**

A steep 35° degree angle allows the snow to roll off the blade effortlessly, while using less horsepower and traction to push more snow.

**OSCILLATION**

Oscillation allows the blade to follow the contours of the ground. Optional lockout kit available for non-snow uses.



**UPDATED**

UltraPlow™

UltraPlow is the flagship of our product line. For those looking for a snow plow without compromise suitable for the largest skid steers on the market today. Tested and time proven on the industry's largest skid steers, the UltraPlow can handle it all.



New for 2017 5/8" thick top punch cutting edge, now standard for 35% longer wear life



DUAL PIVOT A-FRAME

Twice the strength, half the worries. Over 270 lbs. of tough!

NITRO HYDRAULIC CYLINDERS

Five times more salt-resistant than industry standard chrome cylinders.



PLOWING EFFICIENCY

The SnowWolf® UltraPlow has a very tightly rolled moldboard and angles a full 35° to maximize efficiency and minimize fuel and horsepower requirements.



MASSIVE CONSTRUCTION

The SnowWolf® UltraPlow is designed to take abuse from the largest skid steer loaders. At approximately 100 pounds per foot of plow width, you know the UltraPlow means business.



OSCILLATION

The Ultra's exclusive oscillation design allows the blade to follow the contours of the plowing surface.

TRIP EDGE

Full 9" Trip Edge with steel cutting edge ensures protection from unseen obstacles and excellent scraping ability.



"The SnowWolf blades with the wings are the best of both worlds, plus they're very thick, not flimsy. We can still push like a box, but we still have the angling capacity to windrow."


Todd E.

Heritage Development & Management LLC
Roselle, IL



AlphaPLOW™

In a wolf pack, the alpha male is king. The one who does all of the work, with the most wind in his face, and breaks the trail for his followers. Hence, the AlphaPLOW – the biggest, meanest SnowWolf® yet!

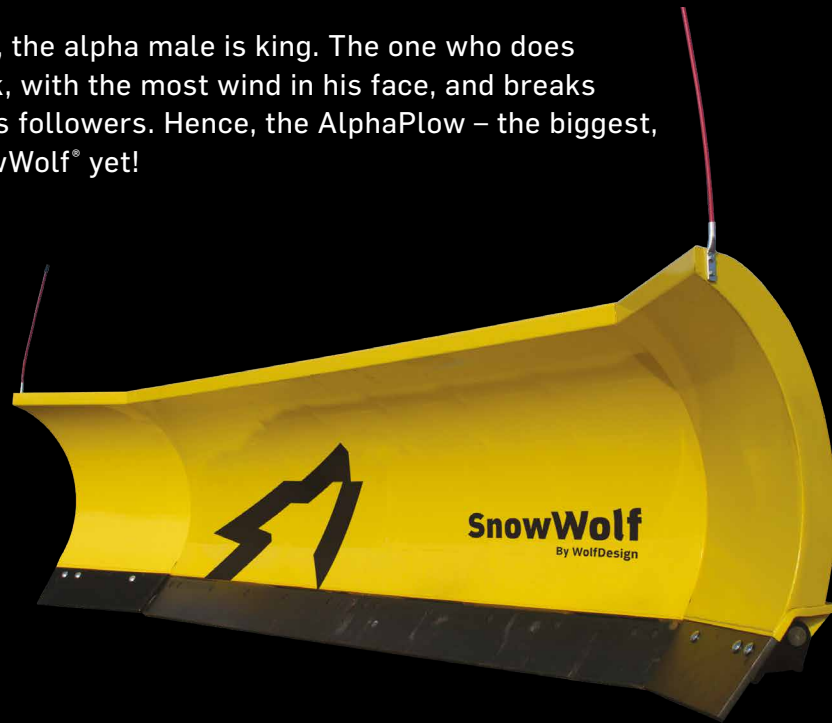

*Shown with optional #80013 Trip-Edge WolfWings, which add 20" per side.



DUAL PIVOT A-FRAME

Twice the strength,
half the worries!



TRIP EDGE

Protects machine and operator from hidden obstacles. Our trip edge is in two sections, so the whole blade doesn't need to trip and full down pressure can be applied.



MASSIVE CONSTRUCTION

Designed for abuse from larger equipment, the AlphaPLOW blade features continuous welded construction and weights of 185 pounds per foot.



NEW FLOATING LOADER MOUNTS

Options available for most wheel loaders, including CAT Fusion, CAT IT, JRB 416 and more.

FastTach®

Quick Release Snow Pusher for UltraPlows. The FastTach® transforms your angle plow into a snow pusher in less than 5 seconds, while you operate it from your cab. If you're a contractor who plows townhomes, condominiums, or have a wide variety of different properties in your portfolio, the FastTach® will change the way you work. It is truly the very best of two worlds – an angle plow and a snow pusher – all in one smooth operation. Ultra-96, 108 & 120.



Pat. #7,654,016,
Other Patents Pending



NEVER MISS A BEAT

Pick up and drop off the FastTach® in seconds without ever leaving the cab. Innovative "Keyhole" design allows the operator to pick up and drop off unit using boom movement, and keeps unit locked while in use.

URETHANE SIDEPLATE SHOES

Built for long haul durability, Urethane Sideplate Shoes are designed to prevent damage to curbs and other obstacles.

MAXIMUM SNOW CONTAINMENT

With the Ultra and FastTach®, simply angle your blade to maintain full snow load containment when turning around islands, corners and obstructions.

ONE-PASS SCRAPING

Ever wish for a snow pusher that would scrape properly to avoid having to go over everything twice? The UltraPlow blade maintains its down-pressure and clean scraping ability, even when the FastTach® is hooked up.

WolfWings

For contractors working regularly on large open lots, WolfWings are a game-changer. Attach them to your UltraPlow or AlphaPlow and leverage the curved wings' containment power to play your tightest, most efficient passing game ever.



WolfWings #60003 urethane edged wings for UltraPlow



WolfWings #60003-TE trip edge polymer wings for UltraPlow



NO WINDROW = EFFICIENCY

Angle Plow + WolfWings give you 43% more efficiency than a snow pusher, and 30% more productivity than a standard angle plow. Instead of taking only half of a blade pass to prevent the snow from trickling off the wrong end of the plow, attach a set of WolfWings and take a full blade pass every time.

TRIPLE YOUR CONTAINMENT

Add 20" width per side. Carry 3 times more snow into the pile in a straight push as you would with no wings at all.

CUTTING EDGES

WolfWings for UltraPlow available with flexible high density urethane (#60003), or high density polymer with trip edge (#60003-TE). WolfWings for AlphaPlow feature a steel trip edge. (See page 9)

CURVATURE

Curved exactly the same as the moldboard, the wings don't disrupt the excellent rolling action.


QUICK RELEASE

Don't want them on? Remove them in less than 30 seconds by pulling two pins per side. (UltraPlow only)



SNOW PUSHERS

RUBBER EDGED, NON-ANGLE



UltraPusher™

PAGE 19

FOR: 6,000 – 14,000 lb. Machinery



Skid Steers



Compact Wheel Loaders



Tractors with Loaders

UltraPusherTE™

PAGE 21

FOR: 6,000 – 14,000 lb. Machinery



Skid Steers



Compact Wheel Loaders



Tractors with Loaders

UltraMaxPusher™

PAGE 23

FOR: 6,000 – 14,000 lb. Machinery



Skid Steers



Compact Wheel Loaders



Tractors with Loaders





UltraPusher™

The SnowWolf® UltraPusher for skid steers blends efficiency, toughness and affordability, and addresses common snow pusher issues with real-world improvements. What's more, it's backed by a 2 year warranty.



TIGHT MOLDBOARD CURVATURE

Our tight curve angle keeps snow "live" and rolling properly, requiring less horsepower and traction to push more snow.

ROUND TUBE SUPPORTS

Round supports reduce snow build-up and minimize disruption of snow rolling action.

PREMIUM RUBBER EDGE

A 1.5" thick, premium rubber edge protects operator from unwanted jolts. Slotted adjustment holes allow adjustment over time to maximize durability.

TRIPLE BACKBONE STRUCTURE

Two large channels span upper and mid sections. A high tensile formed channel spans lower section to maximize torsional rigidity.

UNIVERSAL MOUNT


Standard with a universal skid steer mount adapts to a multitude of different skid steers and tractors.

HIGH STRENGTH BOLT-ON WEAR SHOES

Side plates are protected with long-wearing, AR400 steel shoes, secured with six bolts per side.

PULL-BACK KIT

Need to back-drag with your snow pusher? This optional kit gives you the means.









UltraPusherTE™

Gain a biting edge with the UltraPusherTE. This innovative new snowpusher has a steel cutting edge for the cleanest scrape you can get. Industry-first cushioned sideplates provide ultimate protection for the operator, machine and snowpusher. And without sideplate-to-moldboard supports, it completely eradicates snow buildup to maximize rolling and overall efficiency.

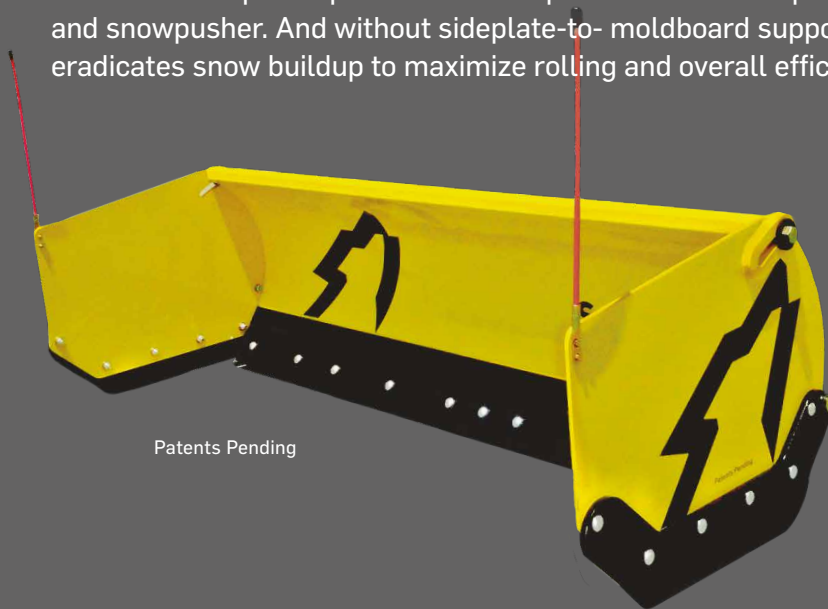

Patents Pending



CLASS-EXCLUSIVE CUSHIONED SIDEPLATES

Industry-first urethane springs protect sideplates from bending by providing up to 10 inches of lateral flex if the pusher hits something at an angle.

CUTTING EDGE

Put down pressure on the 6-inch, high-carbon steel cutting edge for a clean scrape every time.



FLOATING SIDEPLATES

Up-down pivoting sideplates follow surface contours, move the blade over head-on obstacles and allow for down pressure on the cutting edge.

TRIP EDGE

The full 9-inch trip edge easily clears obstacles and protects the operator and machine.



STRUTLESS SIDEPLATES

Elimination of supports between the sideplates and moldboard means no snow buildup and nearly effortless rolling. Tough AR400 sideplate shoes ensure long wear life.



OSCILLATION

Pusher follows contours with up to 10 inches of oscillation to keep the blade on the surface.

TIGHT MOLDBOARD CURVATURE


Tight curve keeps snow 'live' and rolling properly so you can push more snow with less horsepower and traction.





UltraMaxPusher™

The UltraMaxPusher offers all the great features of our UltraPusher in a larger size, in a design perfectly adapted to the needs of backhoe loaders.



TIGHT MOLDBOARD CURVATURE

Tightly rolled moldboards = increased efficiency! Typical Snow Pushers are designed in a “dozer-like” fashion limiting the amount of snow you push by how much dead snow “piles” up out in front and the amount of traction you can get. The UltraMax Pusher keeps the snow rolling.

34" TALL MOLDBOARD

Full 34" tall moldboard with tight curvature allows the maximum snow to be pushed with the least horsepower.

ROUND TUBE SUPPORTS

Round tubing sideplate supports nearly eliminates snow build-up and maximizes the disruption of the snow rolling action.

TRIPLE CONTINUOUS BACKBONE

10" H-Beam Structure: The UltraMaxPusher incorporates a massive H-Beam instead of industry standard channel iron to span the full width of the pusher. Robust steel channels span the upper, middle and lower sections of the pusher to maximize torsional rigidity.

PREMIUM RUBBER EDGE

A 1.5" thick premium rubber edge is utilized for long wear life. Slotted adjustment holes allow adjustment over time to maximize use.

UNIVERSAL BUCKET MOUNT

Simply drive into the UltraMaxPusher with your bucket, and chain it on.

SNOWTIRES



SNOW TIRES



WolfPaws®


PAGE 27



Skid Steers



Bobcat Toolcat



"The SnowWolf WolfPaw tires do a fantastic job of increasing traction and gripping power. They outperform standard skid steer tires by 100-to-1. The WolfPaws are just a phenomenal addition to the equipment. With them, the machine's snow-removal performance is nothing short of incredible."

Brian B.
ACS PowerWash
Glenview, IL



WolfPaws®

Available for any brand of skid steer loader. Serious productivity is lost with skid steer loaders due to lack of traction. The power is there, but skid steers can't get it to the ground. Precious time is wasted spinning wheels rather than working. Have the absolute ultimate. Try **WolfPaws®** with studs. *They will simply outperform anything in winter conditions.*



WARNING: Decorative, sealed or sensitive surfaces will be damaged by carbide studs. Let care and common sense be your guide.



WIDTH

WolfPaws® are 6.6"-8.5" wide, compared to most skid steer loader tiers at 10"-14". WolfPaws® give you nearly double the ground pressure.

TREAD PATTERN

The tread pattern on WolfPaws® tires are actually designed for snow and ice, where as most skid steer tires were never designed for use in snow.

FIRST USE GUARANTEE

Skeptical? If you are unhappy with the performance of WolfPaws® after your first use, return them to your dealer for a Full Refund.



SNOW BLOWER



UltraBlower


PAGE 31



Municipal Tractors



High Flow Skid Steers



"We have several other blowers in our operation and the less moving parts in this machine kept it running throughout the winter. I can say first hand out of the several other blowers that we own that this machine that the crew wanted to take."


Jon C.

JC Grounds Management
Danvers, MA



UltraBlower™

The world's most aggressive snow blower for use on high flow skid steers, municipal sidewalk machines, tractors and more.

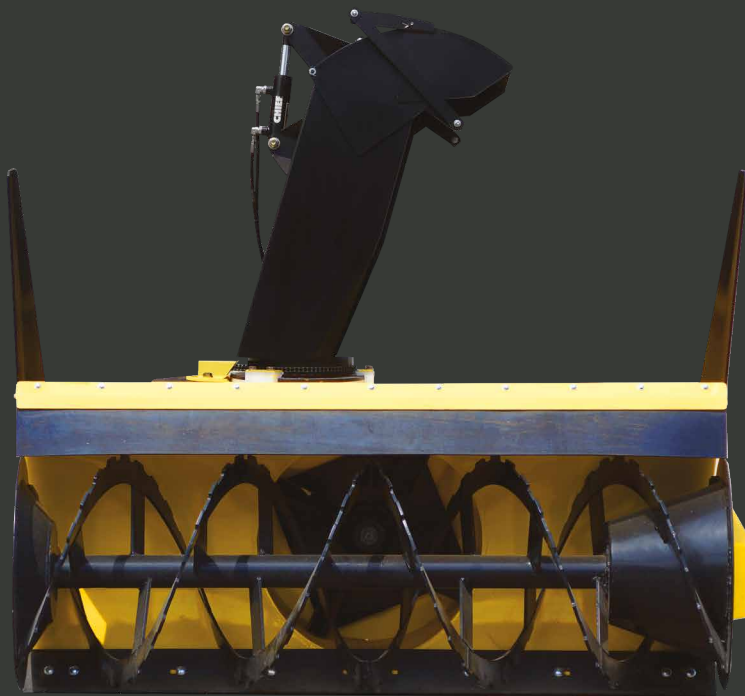

OPEN RIBBON DESIGN

Increases output by up to 200%.



WORRY-FREE

No clutches, shear pins or gearboxes. All functions protected by hydraulic relief valves.



SERVICE SIMPLICITY

The most simple and easy to service design on the market.



AMERICAN MADE.

100% USA components.

AR-400 STEEL AUGER

HD Serrated auger chews up ice and hard piles with ease.



AutoWingPlow Specifications

QuattroPlow

6,000-14,000 lbs.



Model Number	QP-102	QP-114	QP-126	QP-138	QP-150
Blade Width (A)	102" (8'-6")	114" (9'-6")	126" (10'-6")	138" (11'-6")	150" (12'-6")
Moldboard Width (B)	84" (7.0')	96" (8.0')	108" (9.0')	120" (10.0')	132" (11.0')
Overall Width at Full Angle (C)	93.9"	103.9"	113.9"	123.9"	133.9"
Clearing Width at Full Angle (D)	69.8"	79.8"	89.8"	99.8"	109.8"
Clearing Width at Wide Angle (E)	130"	142"	154"	166"	178"
Blade Height	30"	30"	30"	30"	30"
Weight (lbs.) (actual—not ship weight)	1,032	1,074	1,116	1,178	1,220
Moldboard Gauge	10 Ga.	10 Ga.	10 Ga.	10 Ga.	10 Ga.
Trip Springs	4 Ext.	4 Ext.	4 Ext.	4 Ext.	4 Ext.
Wear Shoes	Opt.	Opt.	Opt.	Opt.	Opt.
Moldboard Cutting Edge	1/2" x 6" Reversible High Carbon Standard, Carbide Optional				
Angle Rams	2" x 13" Nitro Steel UltraMAX				
Vertical Ribs	6	6	6	8	8
Moldboard Radius	14"	14"	14"	14"	14"
Full Down Pressure	Yes	Yes	Yes	Yes	Yes
Universal Skid Steer Compatible	Standard				
Crossover Relief Valve	Standard				
Side Plate Thickness	3/8" Grade 50				
Side Plate Wear Shoes	1" High Density Urethane				
Side Plate Hinge Pin	1 3/8" x 21-1/2"				
Side Plate Cylinder	Double Acting, Chrome Plate Rod				
PowerWing Upgrade	Opt.				



SnowPlow Specifications

FOR MACHINES WEIGHING

ProPlow
2,000-6,000 lbs.



UltraPlow
6,000-14,000 lbs.



AlphaPlow
14,000-40,000 lbs.





	Pro-5.0	Pro-6.0	Pro-7.0	Pro-8.0	Ultra-72	Ultra-84	Ultra-96	Ultra-108	Ultra-120	Ultra-132	Alpha-10.0	Alpha-12.0
Model Number	Pro-5.0	Pro-6.0	Pro-7.0	Pro-8.0	Ultra-72	Ultra-84	Ultra-96	Ultra-108	Ultra-120	Ultra-132	Alpha-10.0	Alpha-12.0
Blade Width	5'	6'	7'	8'	6'	7'	8'	9'	10'	11'	10'	12'
Blade Width at Full Angle	49.2"	59"	68.8"	78.6"	59"	68.8"	78.6"	88.5"	98.3"	114.6"	100"	120"
Blade Height	27.5"	27.5"	27.5"	27.5"	30"	30"	30"	30"	30"	30"	38"	38"
Weight (lbs.) (actual—not ship weight)	456	481	507	544	732	774	816	858	920	962	1,920	2,217
Moldboard Gauge	12 Ga.	12 Ga.	12 Ga.	12 Ga.	10 Ga.	10 Ga.	10 Ga.	10 Ga.	10 Ga.	10 Ga.	10 Ga.	10 Ga.
Trip Springs	2 Extension				4 Ext	4 Ext	4 Ext	4 Ext	4 Ext	4 Ext	8 Ext	8 Ext
Wear Shoes	Yes	Yes	Yes	Yes	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	N/A	N/A
Cutting Edge	3/8" x 6"				1/2" x 6"							
Angle Rams	1-1/2" x 10" Chrome				1-1/2" x 13" Nitro Steel						3/4" x 8"	
Vertical Ribs	4	4	4	6	6	6	6	6	8	8	2-1/2" x 13" Nitro Steel	
Moldboard Radius	15"	15"	15"	15"	14"	14"	14"	14"	14"	14"	8	10
Full Down Pressure	No	No	No	No	Yes	Yes	Yes	Yes	Yes	Yes	19"	19"
Spring Assist Down Pressure	Yes	Yes	Yes	Yes	N/A	N/A	N/A	N/A	N/A	N/A	Yes	Yes
Universal Skid Steer Compatible					Standard						N/A	N/A
Cross Over Relief Valve	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Std.	Std.	Std.	Std.	Std.	Std.
SoftTouch™ Cutting Edge	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.
NEW! Oscillation Lockout Kit	Opt.	Opt.	Opt.	Opt.	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
NEW! Manual Angle Kit	Opt.	Opt.	Opt.	Opt.	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
NEW! Upgrade to 4 Trip Springs	Opt.	Opt.	Opt.	Opt.	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
UltraMAX HD Cylinder Kit	N/A	N/A	N/A	N/A	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	N/A	N/A
High Carbon Curb Guards	N/A	N/A	N/A	N/A	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	N/A	N/A

SnowPusher Specifications

FOR MACHINES WEIGHING

UltraPusherTE

6,000-14,000 lbs.



Model Number	UPTE-72	UPTE-84	UPTE-96	UPTE-108	UPTE-120	UPTE-132
Overall Height (A)	30"	30"	30"	30"	30"	30"
Overall Length (C)	36.1"	36.1"	36.1"	36.1"	36.1"	36.1"
Overall Width (B)	74"	86"	98"	110"	122"	134"
Weight (lbs.) (actual-not ship weight)	852	891	933	973	1,037	1,079
Width Between Sideplates	72"	84"	96"	108"	120"	132"
Moldboard Gauge	10 Ga.	10 Ga.	10 Ga.	10 Ga.	10 Ga.	10 Ga.
Cutting Edge	1/2" x 6" Steel					
Vertical Ribs	6	6	6	6	8	8
Side Plate Thickness	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Wear Shoes	5/8" x 37"					
Trip Springs	4 Ext.	4 Ext.	4 Ext.	4 Ext.	4 Ext.	4 Ext.
Full Down Pressure	Yes	Yes	Yes	Yes	Yes	Yes
Oscillation	Yes	Yes	Yes	Yes	Yes	Yes
Hook Up	Universal Skid Steer					

FOR MACHINES WEIGHING	UltraPusher 6,000-14,000 lbs.		UltraMaxPusher 12,000-20,000 lbs.	
				
Model Number	USP-96	USP-120	10.0	12.0
Overall Height	35.5"	35.5"	35.5"	35.5"
Overall Length	40.5"	40.5"	40.5"	40.5"
Overall Width	102.25"	126.25"	126.25"	138.25"
Weight (lbs.) (actual-not ship weight)	876	978	1,200	1,350
Width Between Side Plates	96"	120"	120"	144"
Moldboard Gauge	10 Ga.	10 Ga.	10 Ga.	10 Ga.
Cutting Edge	1.5" x 8"	1.5" x 8"	1.5" x 8"	1.5" x 8"
Vertical Ribs	2	4	4	4
Side Plate Thickness	0.375"	0.375"	0.375"	0.375"
Side Plate Strut	2.375" OD Round Pipe		2.375" OD Round Pipe	
Wear Shoes	3/4" x 5" AR-400		3/4" x 5" AR-400	
Upper Cross Channels	(2) 4" Channels Full Width		(2) 6" Channels Full Width	
Lower Cross Channel	3/8" Four Sided Formed Channel, Full Width		10" H-Beam, Full Width	
Hook Up	Universal Skid Steer		Bucket Mount	

WolfPaws® Specifications



WolfPaws®

Model Number	100	300	400	500	500-36
Tire Height	32.2"	28.5"	36.3"	32.2"	36.3"
Ply Rating	10	6	8	10	8
Overall Width	8.7"	7.9"	10.4"	8.7"	10.4"
Tread Width	7.0"	6.6"	8.5"	7.0"	8.5"
Capacity Per Set of 4	11,120 lbs.	6,640 lbs.	12,120 lbs.	11,120 lbs.	12,120 lbs.
Studs Available	Y	Y	N	Y	N
Wheel Size	16 x 6	15 x 6	16 x 6	16 x 6	16 x 6
Compatibility	All skid steers with 10x16.5 or 12x16.5 tires, using standard 8 bolt pattern	Bobcat Toolcat. Specify 6 on 6, or 6 on 5.5 bolt pattern	All skid steers with 14x17.5 tires, using standard 8 bolt pattern	Bobcat skid steers with 12x16.5 tires using large bolt pattern	Bobcat skid steers with 14x17.5 tires using large bolt pattern

SnowBlower Specifications



SnowBlower




Model Number	SSB-51	SSB-60	SSB-84
Width	51"	60"	84"
Weight (lbs.)	1,296	1,420	1,672
Cutting Height		41"	
Cutting Edge	6" high x 1/2" thick, center punched, bolt-on high carbon steel – carbide insert edges available as an option.		
Auger	28" diameter, HD open flights with ice grinding teeth, AR-400 ultra high abrasion steel.		
Fan	28" HD 4-blade.		
Skid Shoes	2 cast iron skid shoes included.		
Chute Rotation	Hydraulic 270° rotation with relief valve protection.		
Deflector Adjustment	Hydraulically adjustable 3 section, with relief valve protection.		
Smart Valve	Requires only 2 hoses to host machine.		
Hydraulic Motors	Eaton Char-Lynn 6000 Series ultra high pressure cast iron motors.		
Mounting Plate	Universal skid steer mount - others available on special order.		
Req'd Hyd. Flow	28 – 45 gpm.		
Req'd Hyd. Pressure:	3,000 to 4,000 psi - higher pressure available on special request		
Parts Content	Manufactured in the USA with 100% USA built components!		
System Protection	All functions protected by hydraulic relief valves... no clutches, no shear pins, and no gearbox!		

SnowWolf®
by WolfDesign

14311 Ewing Avenue
Burnsville, MN 55306

1 800 905.2265
T 952.224.4430
F 952.224.4444

info@snowwolfplows.com
snowwolfplows.com

 facebook.com/snowwolfplows
 twitter.com/snowwolfplows
 instagram.com/snowwolfplows



LEAD YOUR PACK